





MOUNTING HARDWARE (INCLUDED)

 (4) SCREWS #10 X 2"
 (4) HEX NUT #10
 (4) SCREWS #6 X 1/2"
 (2) SCREWS 1/4 X 1/2"

STEP 1: WHILE ENCLOSURE RESTS ON THE FLOOR, INSERT (2) 2" SCREWS THRU UPPER LEG AND INTO ENCLOSURE ON RIGHT SIDE OF ENCLOSURE. KEEP LEG BRACKET SAME SIDE AS ENCLOSURE. SEE FIG. 1.

STEP 2: OPEN ENCLOSURE DOOR AND SECURELY FASTEN (2) HEX NUTS TO SCREWS THROUGH LEG.

STEP 3: FASTEN CROSS BRACE TO INSIDE OF LEG WITH 1/2" SCREW. AS SHOWN IN FIG. 1.

STEP 4: PLACE LEFT CROSS BRACE OVER BRACKET ON LEG AND FASTEN WITH 1/2" SCREW.

STEP 5: REPEAT STEPS 1 THRU 4 FOR LEFT LEG.

STEP 6: SNAP BLACK CAP INTO TOP OF EACH LEG.

STEP 7: INSERT EACH CAST FOOT INTO BOTTOM OF LEG WITH MATCHED COLOR DOTS AND SECURE WITH (2) 1/2" SCREWS EACH. SEE FIG. 2.


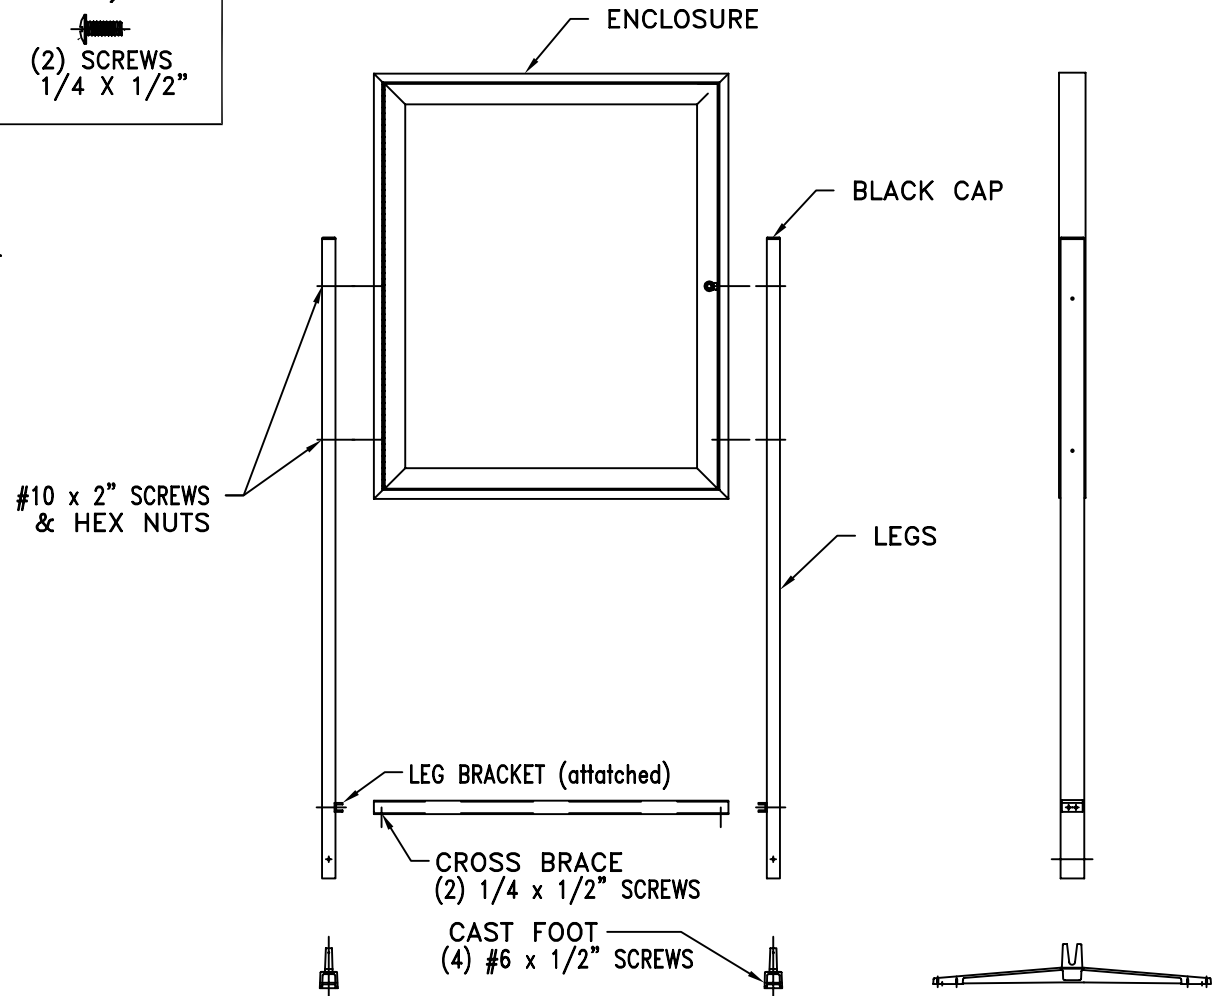


FIG. 1

FIG. 2

SENTRY

Free Standing Message Center

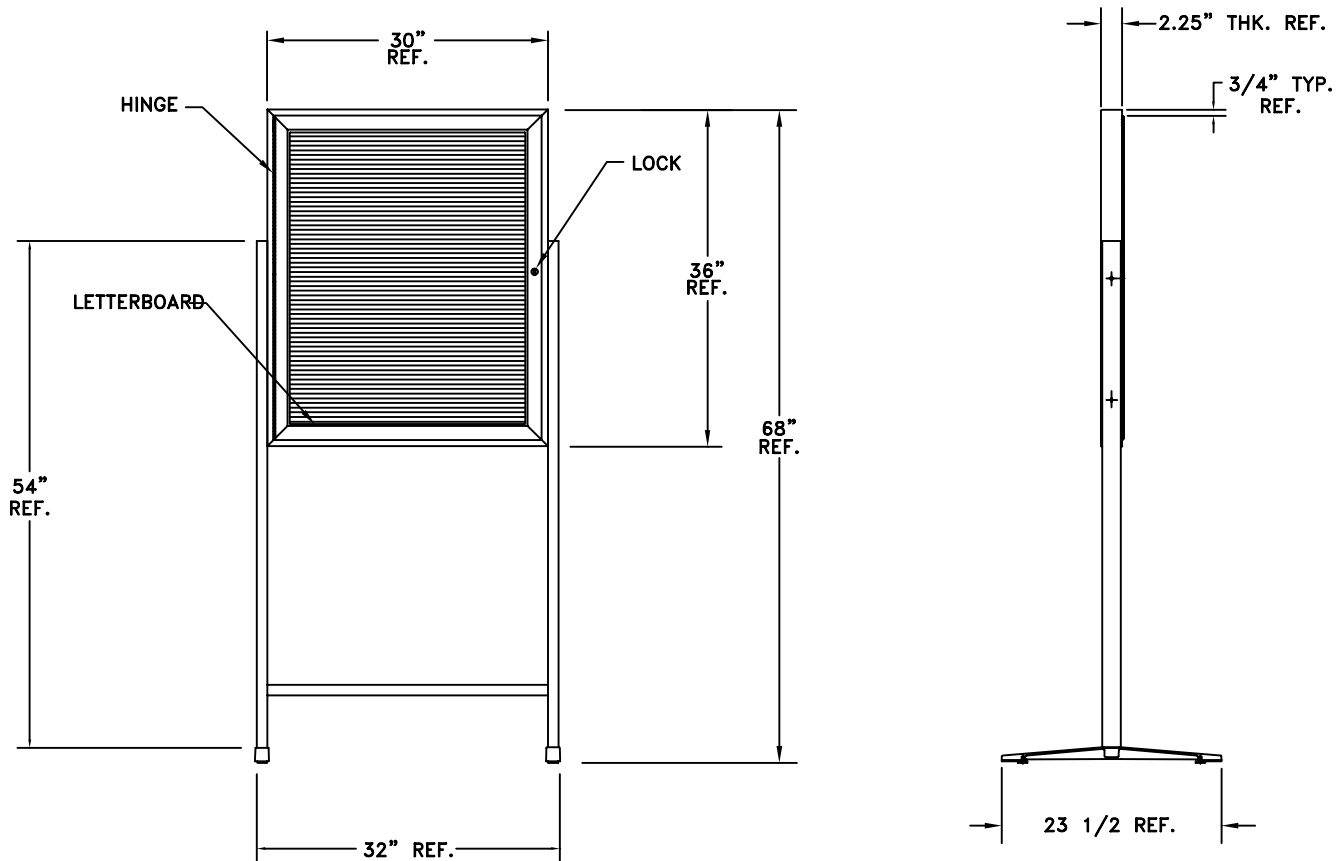

Specifications

All exposed metal shall be extruded aluminum 6063-T5, feet are cast aluminum. Door to be equipped with a continuous piano hinge and built in lock with keys. The large letterboard enclosure provides ample space and is protected behind a locking door featuring shatter-resistant 1/8" thick acrylic. Available in both satin anodized and bronze powder coated aluminum. The unit stands 68" tall. Letterpanel is covered with black felt and is not for outdoor use. Comes complete with a set of white letters and characters.